



# G-8000 G-8500

## Colour and Panel style



Ice White With grooves

## **Available sizes**

#### Widths:

From 6 ft. to 24 ft., in 1-inch increments (From 1.8 m to 7.3 m, in 25 mm increments)

### Heights:

From 8 ft. to 18 ft., in 3-in. increments Note: 8'3", 8'6" and 10'3" are not available (From 2.4 m to 5.5 m, in 76 mm increments)

# **Standard features**

Exterior steel 24-gauge, hot dipped-galvanized

steel

Exterior surface Finely embossed woodgrain design

Deep ribbed steel for extra

sturdiness

Finish Baked-on polyester paint. Can be

painted

Colour Available in Ice White

Panel Thickness 2" (50 mm)

Model G-8500 CFC-free Polystyrene; R-Value 6.6

(RSI:1.2)

Model G-8000 Non-insulated

Weatherstripping Flexible EPDM bottom

Center & End stiles 20-gauge galvanized steel attached

by a Tog-L-Loc® joining system with no rivets at hinge placement

locations.

Tracks 13 or 14-gauge; 2" (50 mm)

commercial tracks for doors less than 140 sq ft (13 sq m) 12-gauge; 3" (76 mm) industrial tracks for doors above

140 sq ft (13 sq m)

Springs Torsion type

Technical specifications and shop drawings for the G-8000 and G-8500 doors are available on this webpage: www.garaga.com/en/industrial


Garaga warrants that the G-8500 and G-8000 products will be free from defects in workmanship and material for one year from the time of installation.

Garaga has established a permanent research program for all its products. As a result of this ongoing quest for improvement, technical specifications for various door systems are subject to change without notice.

# Windows



Single clear plain glass window 1/8 inch (3 mm) is inserted into an expanded PVC frame which is cast without joints. Size: 21 X 13 in. (533 X 330 mm).

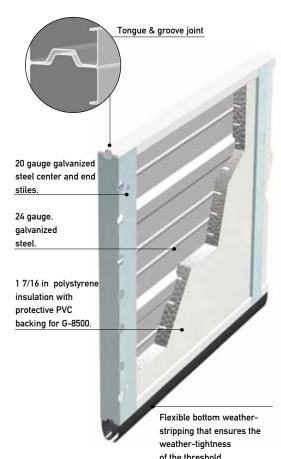

CERTIFIED ISO 9001







GARAGA Inc.

8500, 25<sup>th</sup> Avenue St-Georges, QC Canada G6A 1K5

Tel.: 418 227-9458 E-mail: info@garaga.com



Products manufactured in Canada © Garaga Inc. 2010 - All rights reserved



www.garaga.com